



**Precision Micropipette / Mechanical Pipette (Single Channel)**

*Super soft button* for effortless operation and a premium build quality

*Complete volume range* from 0.1 µL to 10 mL


*Autoclavable* for 30 seconds (half lower part is fully autoclavable)

*Hydrophobic filters* sizes above 10 µl are equipped with replaceable hydrophobic filters to prevent pipettes internal contamination and damage


Channel	Range	Increment	Measuring Volume	Inaccuracy	Impresisoin
1-ch	0.1-2.5 µl	0.05 µl	2.5 µl	±2.50 %	2.00 %
			1.25 µl	±3.00 %	3.00 %
			0.25 µl	±12.00 %	6.00 %
1-ch	0.5 - 10 µl	0.10 µl	10 µl	±1.00 %	0.80 %
			5 µl	±1.50 %	1.50 %
			1 µl	±2.50 %	1.50 %
1-ch	2 - 20 µl	0.50 µl	20 µl	±0.90 %	0.40 %
			10 µl	±1.20 %	1.00 %
			2 µl	±3.00 %	2.00 %
1-ch	5 - 50 µl	0.50 µl	50 µl	±0.60 %	0.30 %
			25 µl	±0.90 %	0.60 %
			5 µl	±2.00 %	2.00 %
1-ch	10 - 100 µl	1.00 µl	100 µl	±0.80 %	0.20 %
			50 µl	±1.00 %	0.40 %
			10 µl	±3.00 %	1.00 %
1-ch	20 - 200 µl	1.00 µl	200 µl	±0.60 %	0.20 %
			100 µl	±0.80 %	0.30 %
			20 µl	±2.50 %	0.80 %
1-ch	100 - 1000 µl	5.00 µl	1000 µl	±0.60 %	0.20 %
			500 µl	±0.70 %	0.25 %
			100 µl	±2.00 %	0.70 %
1-ch	1 - 5ml	50.0 µl	5000 µl	±0.50 %	0.20 %
			2500 µl	±0.60 %	0.30 %
			1000 µl	±0.70 %	0.30 %
1-ch	1-10ml	100µl	10000µl	±0.60%	0.20%
			5000µl	±1.20%	0.30%
			1000µl	±3.00%	0.60%

# Perfect Details Make Your Pipetting Easier


---

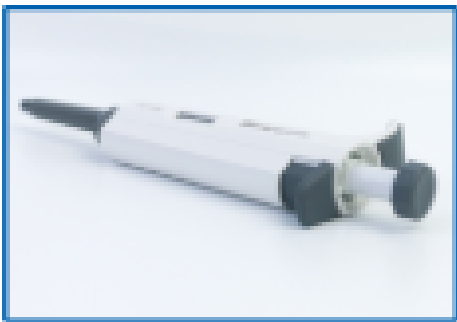

Excellent material, anti-chemical corrosion, wear-resistant, heat-resistant and easy to clean.

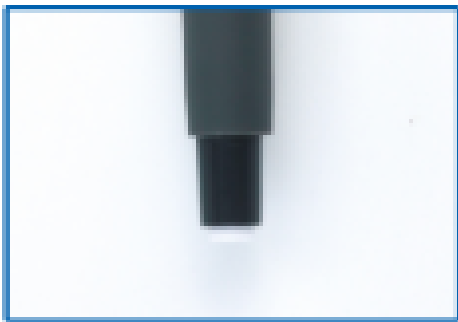

Specifications above 10ul are equipped with an alternative hydrophobic filter element to prevent contamination and extend the life of the pipette.

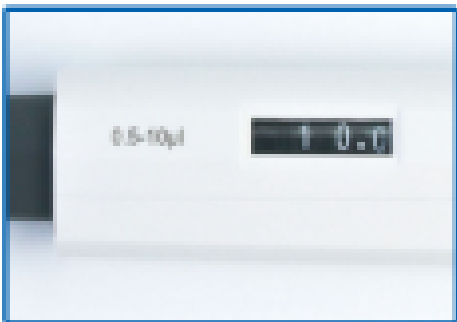

The large and clear display screen, large fonts, and clear black and white greatly improve the visual comfort and effectively reduce the visual fatigue in long-term work.



The Micropipette is ergonomically designed with a finger rest that greatly improves user comfort, achieves an comfortable pipetting experience and prevents RSI symptoms.